
Energy Efficiency & Sensorless

SINOCHRON® Motors

Advantages

- Efficiencies of 90 % and higher
- Sinochronous motors with high performance permanent magnets
- Compact design
- High power density
- Precise speed control

Performance Sinochron® Motors

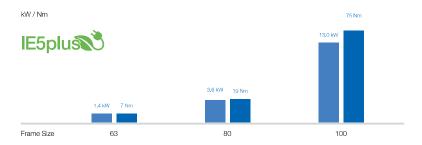

Technical Data

Rated Output (self-ventilated)	0.4 – 13.0 kW
Torque (self-ventilated)	1.3 – 75 Nm
Rated Output (non-ventilated)	0.12 - 6.0 kW
Torque (non-ventilated)	0.75 – 20 Nm
Output Speed	500 – 6,000 rpm
Protection Class	IP54, IP55
Inverter	Integrated / Stand-alone